



GLUESPACK GLUING SYSTEM

New generation of glue pot with...

Parallelogramm system

*Safe and regular
glue deposit*

*Designed
for high grade board*

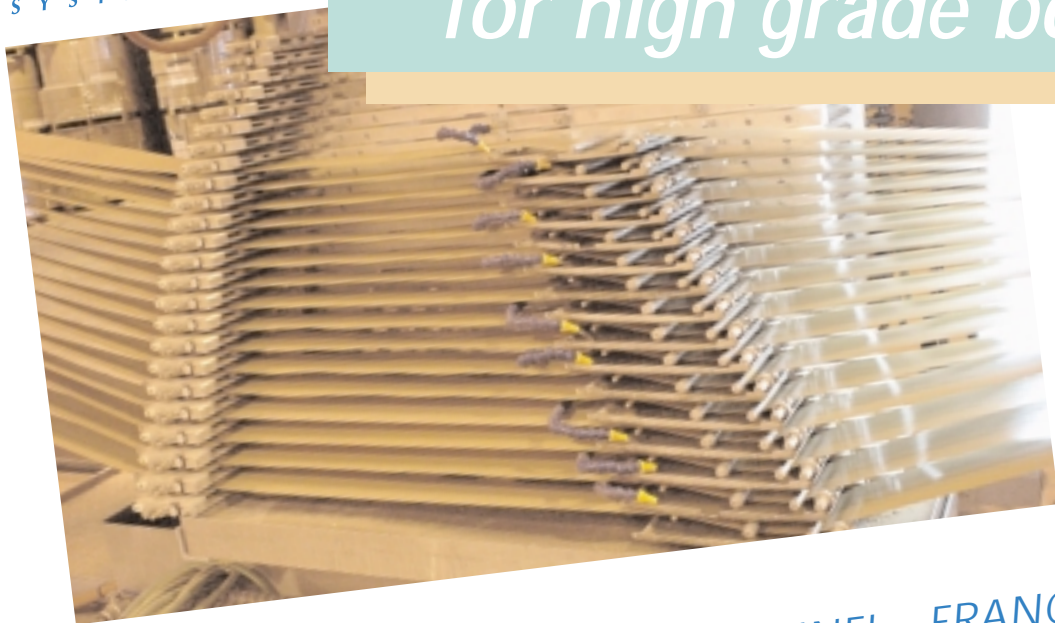

ZI - Rue des Maucourants - 10400 TRAINEL - FRANCE
Tél. 33 (0)3 25 39 46 70 - Fax 33 (0)3 25 39 46 75
E-mail : spack-system@spack-system.com - Web site : www.spack-system.com

Innovations

- Parallelogram system for easy setup and regular paper spread.
- Hard material for scrapers no wear out.
- Double cascade.

Advantages

- No paper ply bending (each one comes straight to the winding mandrel).
- High ply tension (pneumatic tensionners).
- Easy set up.
- Up to 35 plies one side.
- Low moisture results on tube.

Options

- Glue heater (heating power 36 kW).
- Glue mixer.
- Angle and position displays.
- Double face gluing.

Features

- Max winding speed : 130 m/min
(430 Ft/min)
- Max ply width : 200 mm
(8")
- Type of glue : Dextrin, PVA and silicate

